


SI 560A




Feature

- Dual display(Main, P/N, SP1, SP2, SP3, SP4)
- Weighing mode : Limit mode, Packer mode, Checker mode
- User custom setting : External input, Relay output
- Power Selectable : DC & AC Ordering Spec.
- MODBUS(RTU) protocol


Physical Dimension [Unit:mm]

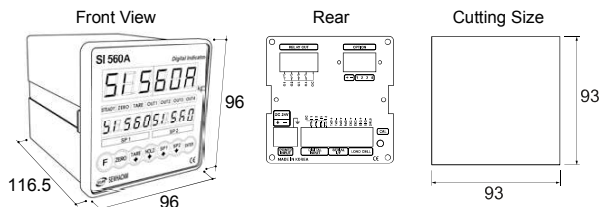


		SI 560A
ANALOG PART	Input Sensitivity	Min. 0.1μV / Digit
	Load Cell Excitation	DC 5V
	Non-Linearity	0,001% of Full Scale
	Input Signal	Max 3.0 mV/V
	A/D Sampling	Max 120 time/sec, Sigma-Delta
	Resolution	Internal: 1/1,000,000 Display: 1/20,000
DISPLAY PART	Main Display	6 Digit Red FND, Letter size : 15 mm /
	Sub Display	10 Digit Red FND, Letter size : 13.5 mm
	Under Zero	Minus(-) Display
	LED	STEADY, ZERO, TARE, OUT1, OUT2, OUT3, OUT4
GENERAL PART	Power Supply (Order Selectable)	DC12~24V, 12W Free Voltage(AC 100V~240V, 50/60Hz)
	Operating Condition	Temperature: -10°C~+40°C, Humidity: Under 85% RH
	Size/Weight	96(W) x 96(H) x 116.5(D) mm / 0.5kg(DC) 0.7kg(AC)
	Interface	RS422 & RS485, Modbus
	External Input	4EA
	Relay Output	4EA
	Option	RS232C, Analog output 4-20mA, 0-10V



Auto Packer



Auto Checker



Filler Application