

SI 400 / SI 400S



Feature


- Dual color display
- User custom setting : External input
- Hold Function : Sample, Average, Peak
- SD memory (Option card)
- MODBUS(RTU) protocol (Option card)




Feature

- Red FND
- User custom setting External input
- MODBUS(RTU) protocol (Option card)

Physical Dimension [Unit:mm]

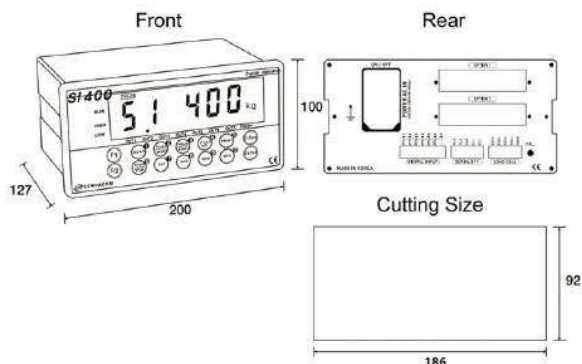


Physical Dimension [Unit:mm]

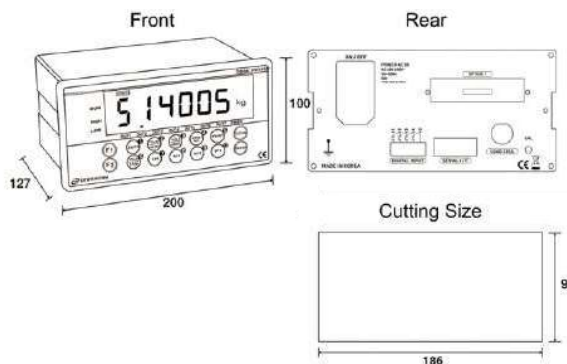

INDICATOR


SI 400/SI 400S			
ANALOG PART	Input Sensitivity	Min. 0.1 μ V / Digit	
	Load Cell Excitation	DC 5V	
	Non-Linearity	0,001% of Full Scale	
	Input Signal	Max 3,0 mV/V	
	A/D Sampling	Max 120 time/sec, Sigma-Delta	
DISPLAY PART	Resolution	Internal: 1/2,000,000 Display: 1 / 20,000	
	Main Display	7 Segment, 6 Digit Red FND, Letter size : 25,4mm	
	State Alarm	Green LED, 8EA	
GENERAL PART	Under Zero	Minus(-) Display	
	Power Supply	Free Voltage(AC 100V~240V, 50/60Hz)	
	Operating Condition	Temperature: -10°C ~ +40°C, Humidity: Under 85% RH	
	Size/Weight	200(W)x100(H)x126.5(D) / 1.23kg	
	Interface	RS232C, Current loop Standard built in, Modbus (Option)	
	External Input	6EA	4EA
	Relay Output	None	None
Option	Analog Output 0-10V, 4-20mA / Serial Interface RS232C, RS422, RS485 BCD Input / BCD Output / Ethernet / SD memory card	Serial RS232C/RS422/RS485	




Crane Scale



Tester



Tank Scale



Truck Scale